

125*125mm

WIPCOOL®

CSC-1 MINI SPLIT A/C CLEANING COVER

Installation&cleaning procedure



Step1

Use both hands to pull up the bracket and hanging above the split type air conditioner on both corners, must fixed the plastic board on the air conditioner securely.



Step2

Insert the transparent film to the back of the air conditioner (including the two corners at the lower back of the air conditioner) to prevent walls and other places from splashing/splattering of the sewage during the process of cleaning.



Step3

Insert the adjustable support rods to the both holes and adjust the proper length



Step4

Wrap the 2 corners after finish the support rod's installation



Step5

Connect with outlet hose



Step6

there are 3 openings on the front film and you can choose any one according your cleaning needs



WIPCOOL®

IDEAL PRODUCTS FOR HVAC

MINI SPLIT A/C CLEANING COVER

Full Protection, Easy Installation

- Made of artificial PU grade waterproof sealing strip with tight stitches, soft & durable
- The adjustable support rod can change the length and suit for different split air conditioner
- Transparent front film can see coils' cleanliness clearly and prevents splashing
- 4 small transparent back films prevent walls from splashing/splattering of the sewage during the process of cleaning

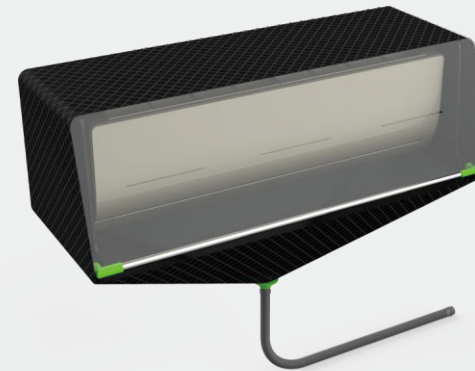

Adjustable support rod with 2 plates



transparent front films



4 transparent back films

Model	SIZE (mm)
CSC-1	H:280*W:300*L700-1000(Adjustable)

32*11mm

BACK FILM